



Electrical Specifications

Center Frequency: 450 MHz
Bandwidth: 300 MHz
Passband : 300 MHz to 600 MHz
Insertion Loss: ≤ 2.0dB @ 450 MHz
Return Loss: >15dB @ 300 MHz to 600 MHz
Rejection: >30dB @ 0-225 MHz
Rejection2: >30dB @ 675 MHz to 4000 MHz
Impedance: 50 Ohms


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA(F)
Dimensions: 4.480" x 1.470" x 0.620" in.

Environmental

Operating Temperature: -25°C to +70°C
Storage Temperature: -40°C to +90°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200Hz

Outline Drawing:

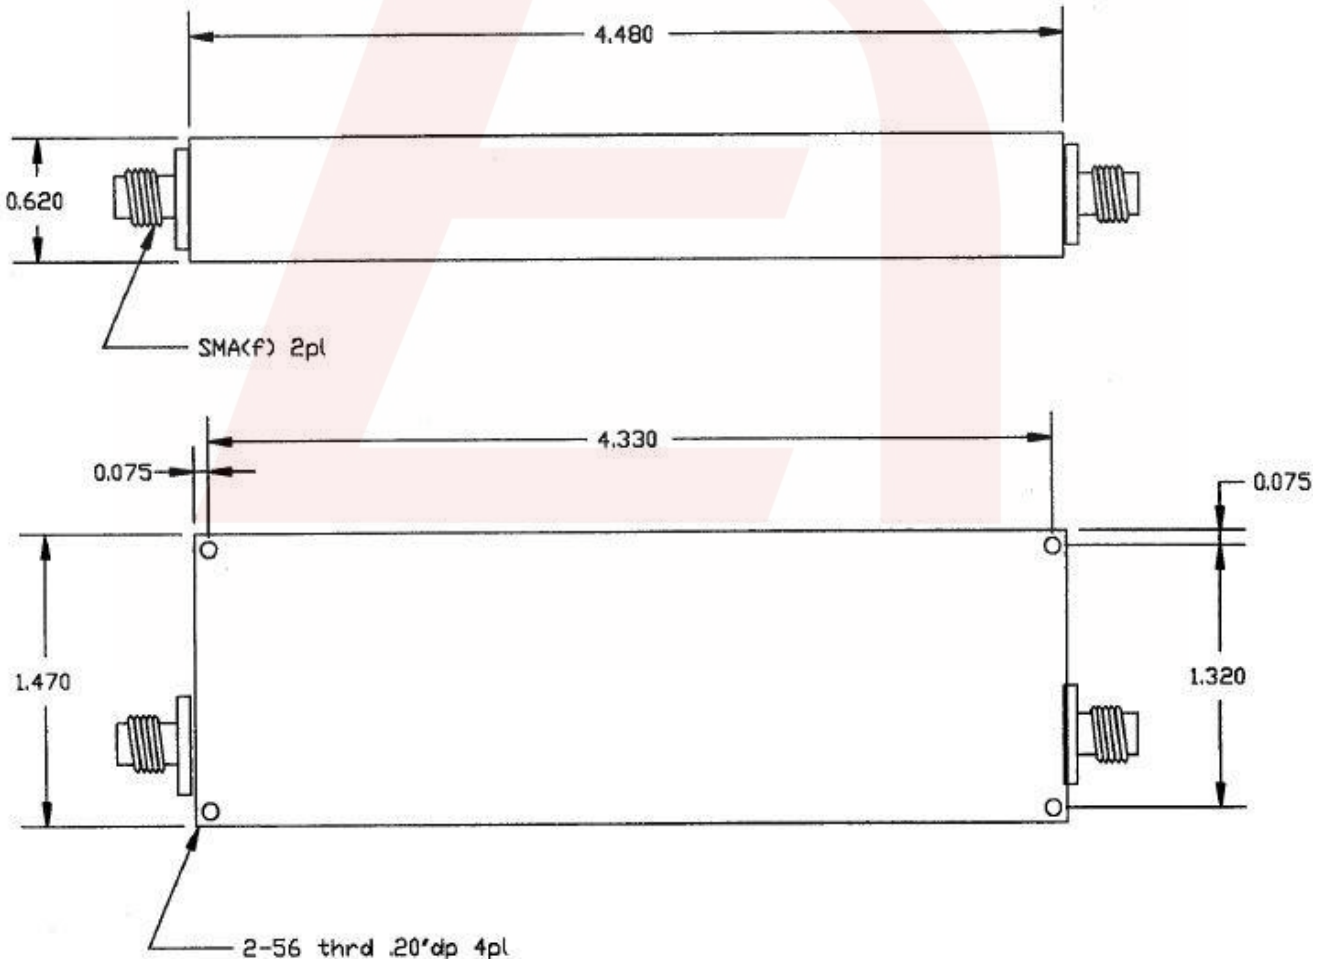

DS-B10231-04082019-Rev0

