




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	280.0	-
Insertion Loss at Fo	dB	-	TBD	4.5
Amplitude Ripple Variation	dB _{p-p}	-	TBD	2.00
4.5 dB Bandwidth	MHz	10	TBD	-
Attenuation:				
Fo-100 – Fo-37.5 MHz	dB	48	TBD	-
Fo+37.5 – Fo+100 MHz	dB	48	TBD	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-10	-	+50
Storage Temperature Range	°C	-20	-	+60
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	0
Source Impedance (Single Ended) ₁	-	-	230 // -0.2pF	-
Load Impedance (Single Ended) ₁	-	-	230 // -0.2pF	-
Package Size and Type	3.8 x 3.8 x 1.4 mm		S1	




Outline Drawing:

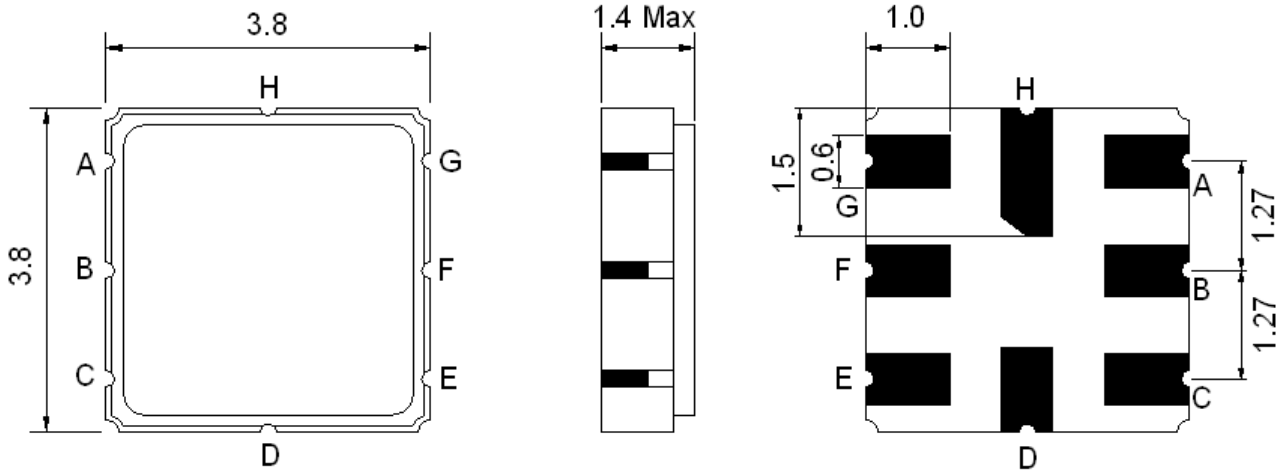

PIN Descriptions	
Input	B
Output	F
Ground	A C D E G H

Testing Environment:

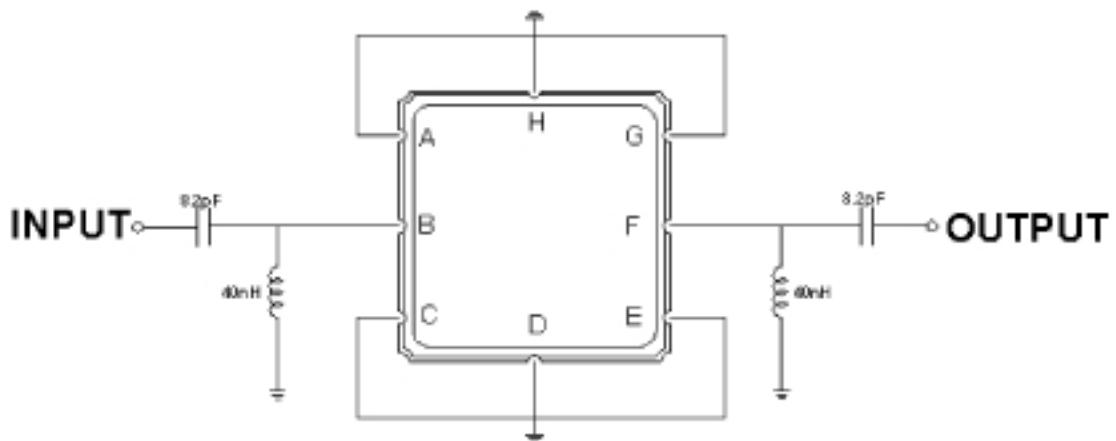

Source & Load Impedance: 50 Ω